The SEGUF X®-System

- Humane and reliable restraint with many positioning options -





The History of SEGUFIX®

An ancient problem

Since ancient times the necessity of immobilizing a patient for his recovery was common. However, restraining limbs often delayed recovery, for example by causing panic attacks or bedsores. Up to the 1960s restraint methods remained the same. Then the equally simple and brilliant idea of a worried and caring father should open a new chapter in the history of restraints.

A toddler's misery

Said father had a two-year-old son, who suffered from severe pneumonia. When the boy resisted the necessary bed rest, the doctors had no other choice but to tie him down by his hands and feet. Confused and terrified the little boy refused to eat. When faced with this new problem, the doctors ordered force-feeding. The desperate parents couldn't bear that thought and took their child home at their own risk.

Love is inventive

In the comfort of his own home the little boy quickly regained his previous spirits and appetite, but he still would not stay in bed. This inspired the worried father to create a harness for keeping his recovering child in bed, foremost leaving hands and feet unrestrained. The sick little child accepted the harness, stayed in bed and soon recovered.

A solution for many

Years later, the father learned about the significance of medical restraints. Many patients had to suffer, just because they were not staying in bed or simply would fall out of bed – a problem he had already solved for his son years before.

Renowned physicians recognized the benefits for patients and nursing staff. Prof. Dr. Dr. h.c. Bürger-Prinz introduced the new restraint at the University Hospital Hamburg-Eppendorf (UKE). Among experts the SEGUFIX°-System was met with great approval, and shortly after the SEGUFIX°-System was established internationally as the humane method of patient restraint.

Maximum freedom with minimum restraint

Restraint requirements are complex, and at times it may be necessary to restrain limbs. To meet the individual requirements our product range was expanded in close cooperation with medical professionals. Whenever new products are being developed the guiding principle "Maximum freedom with minimum restraint" is being applied.

The humane restraint

Accordingly, the SEGUFIX°-System offers humane and sophisticated positioning and restraint solutions for patients and care personnel. These solutions allow precise restraining and thus prevent inhumane restraint of past days.

For this reason medical experts unanimously describe the SEGUFIX®-System as "the humane system" at its very introduction. In all areas of patient care and even in difficult care situations, the humane approach results in great relief for everyone involved.

Reliability in daily care

As inventor and manufacturer of the SEGUFIX®-System we are happy to offer products that allow you to provide safe and reliable care.

As a family business with almost 50 years of experience, the next generation will also support you as a reliable partner with continuity, quality and professionalism.

The Sánchez-Wysozki Family

Product groups

Product group 1000: SEGUFIX®-Locks and Keys













Product group 2000: SEGUFIX®-Bed Restraint System











Product group 3000: SEGUFIX®-Auxiliary Belts







Product group 4000: SEGUFIX®-Quick Restraint









Product group 5000: SEGUFIX®-Mobile Restraint











Product group 6000: SEGUFIX®-Transport System











Product group 7000: SEGUFIX®-Chair Belt System







Product group 8000: SEGUFIX®-Accessories and Sheepskin











Table of Contents


The His Overview Table of SEGUFI SEGUFI Product	f Contents X°-Traffic X°-Safety X°-Quality	EGUFIX® sight SEG s Light Lak Informat / Standar / Abbrev	peling ion rds	oduct groups 1000 - 8000 r various versions	Page 2 3 4-5 6-7 8-9 10 11 15 48
SEGUI	FIX®-Loc	ks and	Keys	Product group 1000	Page
1206 1208 1209 1210 1212 1213 1215				 SEGUFIX®-Magnetic Lock black / segufix.com SEGUFIX®-Magnetic Key red SEGUFIX®-Magnetic Key red with key ring SEGUFIX®-Patent Twist Lock green SEGUFIX®-Patent Twist Key yellow Push Lock Push Lock Key 	12 12 12 13 13 14
SEGUI Item	FIX [®] -Bed	l Restra	int Syst	em Product group 2000	Page
2203 2204 2205 2211 2212 2217 2221 2222 2224 2231 2232 2250/r	2303 2304 2305 2311 2312 2317 2321 2322 2324 2331 2332 2350/r	2403 2404 2405 2411 2412 2417 2421 2422 2424 2431 2432 2450/r	2705 2711 2721 2724 2731	 SEGUFIX°-Shoulder Restraint SEGUFIX°-Hand Restraint SEGUFIX°-Foot Restraint SEGUFIX°-Thigh Restraint SEGUFIX°-Shoulder Additional Belt SEGUFIX°-Head Positioning Belt SEGUFIX°-Standard with Crotch Strap SEGUFIX°-Complete with Crotch Strap SEGUFIX°-Hand Restraint lengthend SEGUFIX°-Standard with Thigh Straps SEGUFIX°-Complete with Thigh Straps SEGUFIX°-Compact 	20 21 22, 23 22, 23 20 24 16 17 21, 23, 30 18 19 25
SEGUI	FIX [®] -Aux	iliary B	elts	Product group 3000	Page
3240 - 3244	3340 - 3344	3440 - 3444	3110/r 3745	 SEGUFIX®-Brace Strap for legs SEGUFIX®-Extension Belts SEGUFIX®-Extension Belt with Snap Lock 	27 26 26
SEGUI	FIX®-Qui	ck Rest	raint	Product group 4000	Page
4213/r 4214/r 4215/r	4313/r 4314/r 4315/r			 SEGUFIX®-Quick Restraint Shoulder SEGUFIX®-Quick Restraint Hand SEGUFIX®-Quick Restraint Foot 	28 28 29


Item	-IX -IVIO	olle nes	otraiiit	Product group 5000	Page
	 <i>-</i>				
5204/r	5304/r	5404/r	E740	SEGUFIX® - Hand Waist Restraint	32
5218	5318	5418	5718	SEGUFIX®-Restraining Aid SEGUFIX® OF THE PROPERTY OF	33
5243	5343	5443	5745	SEGUFIX® -Stretcher Restraint Shoulder	30
5245	5345	5445	5745	SEGUFIX®-Stretcher Restraint Foot	30, 31
SEGUF	-IX®-Trai	nsport S	System		
Item		·		Product group 6000	Page
6216	6316	6416	6710	SEGUFIX®-Transport Waist Belt	34
			6720	SEGUFIX®-Suspender Belt	35
			6730	SEGUFIX®-Backrest Strap	35
6240	6340	6440	0,00	SEGUFIX®-Support Belt without Crotch Pad	36
6244	6344	6444		SEGUFIX®-Support Belt with Crotch Pad	36
6256	6356	6456	6750	SEGUFIX®-Multi Belt	37
6266	6366	6466	6760	SEGUFIX®-Pelvic Belt	38
6276	6376	6476	0700	SEGUFIX®-Pelvic Belt with Crotch Strap	39
	0070	0110		SEGOTIA TONIO BOIL WILLT GIOLOTT GILLAP	
SEGUF	FIX®-Cha	air Belt	System		
Item				Product group 7000	Page
7240 7246	7340 7346	7440 7446	7740	SEGUFIX®-Chair Belt	40 - 41
7250 7256	7350 7356	7450 7456		SEGUFIX®-Chair Belt with Crotch Strap	42
7260 7266	7360 7366	7460 7466		 SEGUFIX®-Chair Belt with Thigh Straps 	43
			7770	 SEGUFIX®-Transport Hand Strap Velcro® 	44
7280	7380	7480	7780	 SEGUFIX®-Transport Foot Restraint 	44
SEGLIE	FIX®-Acc	essorie	s / Shee	enskin	
Item	IX -Acc	,0330110	,3 / 01100	Product group 8000	Page
8010				SEGUFIX®-Sheepskin Bed Cover SEGUFIX®-Sheepskin Bed Cover SEGUFIX®-Sheepskin Bed Cover	45
8011				SEGUFIX®-Sheepskin for Wheelchair Cover OFOURING Observation Payddings	45
8012				SEGUFIX®-Sheepskin Padding Color of the Color of Third Co	45
0040				for Standard with Crotch Strap / Thigh Straps	00
8013				SEGUFIX®-Protective Cover	39
8014				SEGUFIX®-Transport Bag	46
8015				SEGUFIX®-Response Bag	46
8016				SEGUFIX®-Pull-up Line	47
8017				Anti-Slide-Mat	46
8018/GE	3			SEGUFIX®-Instruction DVD	47
8022				SEGUFIX®-Laundry Net	27, 47

Colour labeling for easy product identification

The SEGUFIX®-Traffic Light Labeling with coloured SEGUFIX®-Labels offers the following advantages:

- Distinct colours allow for easy identification of SEGUFIX®-products
- Classification of body areas according to traffic light colours red / yellow / green (see Illustration)
- Unique identification of products by item number and product name (multilingual)
- Easy identification of size through noticable positioning on the label
- Labeling according to DIN EN ISO 15223-1



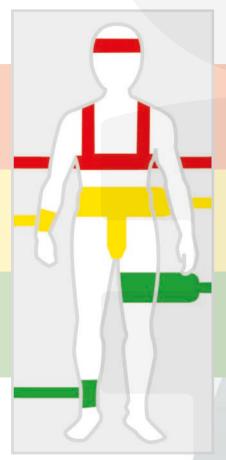

RED -Shoulder and Head

YELLOW -Waist and Hand

GREEN -Thigh and Foot









WHITE Transport Products






SEGUFIX®-Products according to Traffic Light Labeling

RED - Shoulder and Head	YELLOW - Waist and Hand	GREEN - Thigh and Foot
Shoulder Restraint	Standard with Crotch Strap	Thigh Restraint
Shoulder Additional Belt	Standard with Thigh Straps	Foot Restraint
Head Positioning Belt	Hand Restraint	Connecting Belt
Quick Restraint Shoulder	Quick Restraint Hand	Quick Restraint Foot
Stretcher Restraint Shoulder	Compact	Stretcher Restraint Foot
	Hand Restraint Belt	Brace Strap for legs
	Restraining Aid	

WHITE - Transport Products	BLUE - Auxiliary Belts
Chair Belt	Extension Belts
Support Belt	
Pelvic Belt	
Multi Belt	
Transport Waist Belt	
Backrest Strap	
Suspender Belt	



The SEGUFIX®-Traffic Light Labeling will accompany you throughout this catalogue for all applicable products.

Coloured labels according to the traffic light system red / yellow / green.

Product labels are assigned to three body areas according to traffic light labeling.



The following instructions for use are only applicable to original SEGUFIX® products. Do not use the SEGUFIX®-Restraint and Positioning System until you have read and understood the instructions for use. Instructions are available online. Product and instructions must match. Failure to use this product properly can cause serious injury or death. Your patient's safety depends on your using the SEGUFIX® System correctly.

SEGUFIX® - Patient restraint according to indications

1. Requirements for use:

It is the user's responsibility to comply with all national laws. Always consider restraining protocols of your work place and current legislation. The instructions for use must be adhered to.

SEGUFIX®-Products may only be used by individuals with proper training and knowledge of the product. Legal provisions and doctor's orders must be strictly observed! The attending physician must ensure, that the patient's medical condition allow the application of the SEGUFIX®-System.

2. Intended use:

SEGUFIX® products may only be used for the medical purposes, which they were designed for.

3. Remove dangerous objects:

Remove all objects from the reach of the patient, which could lead to injury or may damage the belts (e.g. glasses, jewelry and sharp objects).

4. Inspect products before use:



Inspect before each use for broken stitches, torn, worn out or frayed parts and damaged eyelets. Damaged products could cause injury. Do not use damaged or worn out products.

5. Locks may not be under tension:

When opening the locks ensure movement between the upper and lower points of contact (item no. 1206). Therefore each lock can hold up to a maximum of 4 belt layers (exception: products with "r" of "f" in the item number have thicker belts. These allow for a maximum of 3 belt layers!).

When using the Push Lock use no more then 3 belt layers.

6. Always attach Side Positioning Straps:

The SEGUFIX®-Standard with Crotch Strap or Thigh Straps must always be used with the Side Positioning Straps attached. Side Positioning Straps prevent the patient from helicoptering in bed or from getting over the edge of the bed causing strangulation, possibly resulting in death. In some cases it is possible that patients get over the edge of the bed even with the Side Positioning Straps attached and the side rails in the up position. In these cases additional restraint measures must be taken. Important: Insert the Side Positioning Straps through

the respective loops (according to instructions) be-

fore securing them to the bed belt.

7. Beds, chairs and stretchers:

- Use SEGUFIX® products only on beds, stable chairs and stretchers that allow the product to be attached to, in accordance with the instructions.
- Products must be attached in such manner, that they cannot get out of place.
- Note that straps and moving mechanics of beds, stretchers or chairs (or alternating pressure pads and the like), may interfere with each other causing damage and loss of function.
- The attachment points must be free of sharp edges.
- SEGUFIX® products do not prevent beds, chairs or stretchers from tipping over or from unintended movement.

Helpful hints:

European standards for beds: DIN EN 60601-2-52 European standards for wheelchairs: DIN EN 12182 and DIN EN 12183

8. All side rails must be in the up position:



To prevent accidents always lock side rails in the up position (exception: 5-point-restraint).

Note: Do not use with parted side rails except with a gap protector that effectively prevents the patient

from slipping through the gap. An open gap could allow the patient to slip through even with the restraint fastened possibly causing strangulation.

9. Monitor patients in restraints:



Patients in restraints require frequent monitoring.

Aggressive, agitated or restless patients and patients in danger of aspiration require constant monitoring.

10. Test closure-systems prior to each use:



Check SEGUFIX®-Magnetic Locks black/segufix.com, SEGUFIX®-Patent Twist Locks green, Push Locks, Snap Locks, Velcro® Fasteners and Buckle Locks for a secure hold.

Do not submerge locks in any type of liquid. This may cause malfunction. If damaged locks fail to open, straps can be cut with scissors or belt cutters. Check the head of the metal pin for signs of wear and tear (rounding off or compression).

11. Pacemaker Warning:



A distance of 10 cm (4 inches) must be maintained between a patient's pacemaker and the SEGUFIX°-Magnetic Key, otherwise a tachycardia might be triggered (alternatively use Push Locks).

For possible interference of strong magnets with other patient implants please refer to manufacturer's instructions of these products.

12. Test products for correct attachment:

Frequently check products for correct attachment. The straps must be secured to the frame of the bed (or the folding part of the frame of the bed) keeping them in place $\underline{\text{tightly}}$ on the mattress.

13. Only use original SEGUFIX® products:

For safety reasons SEGUFIX® products must not be altered or be combined with third party products.

14. Use of SEGUFIX® products in vehicles:



The SEGUFIX®-Transport Belt System does not replace the vehicles seat belt system. SEGUFIX®-Transport Belts may only be used as additional support or for positioning of the patient. Make sure that

the patient can be rescued quickly in case of an emergency.

15. Secure but not too tight:

Belts must be fastened tightly, but not interfere with breathing or blood circulation. Loosely fastened products may jeopardize the patient's safety. Frequently check products for correct position.

16. Storage:

To prolong product life store belts and locking systems in cool, dry and dark conditions at about 20° C.

17. Flammability of SEGUFIX®-Bed Restraints:



According to DIN EN 71-2 section 4.3 non-flammable.
According to DIN 75200 the burning rate is zero.

However, products may not come in contact with cigarettes or be exposed to open flame, as this could permanently damage the products and this could lead to injury.

18. Proper sizing:

Make sure to choose the proper size according to body and waist sizes (refer to sizing table). Products that are too small or too large compromise the patient's comfort and safety.

19. Disposal:

Carton and plastic wrapping can be disposed of in recyclable disposal, defective products in household garbage.

20. Declaration of conformity:

For the declaration of conformity please visit: www.segufix.com/conformity.php

21. Expert recommandation:

(Prof. Dr.-Ing. U. Boenick, TU-Berlin)

- 1. Always use Side Positioning Straps
- 2. Lock non-parted bedrails in the up position (exception: five-point-restraint)
- The use of additional restraint elements may be necessary to eliminate bed egress.

22. Ensure prior to each use:

- Pull-test of locks
- Visual inspection of belts and locks
- Ensure sufficient medical indication
- Check legal requirements

SEGUFIX® Quality has been proven and tested for almost half a century

For close to 50 years, the trademark SEGUFIX® stands for the consistent high quality of its products, manufactured with selected and high-grade raw materials, solid workmanship and sophisticated functionality. Continuous quality control ensures high security standards.

Instructions for use – safety instructions – product labeling

The detailed and illustrated instructions for use of the products with safety information and warnings explain the proper application of the SEGUFIX®-Systems. All SEGUFIX® products come with laundry instructions and CE-labeling. The coloured labels according to the traffic light system provide guick and easy guidance for the use of the products.

SEGUFIX® belts are flame retardant according to DIN 75200 and DIN EN71-2 section 4.3
 SEGUFIX® belts comply with the strict norms of the automobile industry in accordance with
 DIN 75200 as well as DIN EN 71-2 secton 4.3 Safety of toys – flammability.

Product innovation

SEGUFIX® maintains a new product development division. In close cooperation with hospitals, rehabilitation centers and other medical institutions through the years solutions for existing problems have been developed. Thus leading to new and very useful products that have become integral parts of today's patient care.

Professional customer support

Our specially trained personnel are looking forward to advising you on all product related questions.

Medical Exhibitions – Training

We offer information about new products and product training during the anual medical exhibition MEDICA in Düsseldorf, Germany.

• Stable Pricing

Due to our innovative and efficient production processes, our prices have remained stable for 18 years, passing along the production savings to our customers.

Quick and dependable delivery

SEGUFIX® products are shipped expeditiously worldwide.

SEGUFIX® online

Product information is accessible 24/7 online at www.segufix.de

Locks and Keys Item 1106 - 1215

Abbreviations for various versions

Basic version - with medium bed belt

 Span width* of eyelet straps: 1200 - 1450 mm (47.2 - 57.1 inches)
 Span width* Velcro® belts: 950 - 1540 mm (37.4 - 60.6 inches)

(no letter code, e.g. ltem 2221-M, 2211-M, 2205-M etc.)







Version b - with short bed belts

- Span width* of eyelet straps: 1000 1200 mm (39.4 47.2 inches)
 Span width* Velcro® belts: 920 1330 mm (36.2 52.4 inches)
- Bed belts are shorter than the basic version on each side by approx. 130 mm (5.1 inches)





Version e - with extended bed belts

- Span width* of eyelet straps: 1450 1700 mm (57.0 66.9 inches)
 Span width* Velcro® belts: 950 1800 mm (37.4 70.9 inches)
- Bed belts are longer than the basic version, extended on each side by approx. 200 mm (7.9 inches)





Version f - fleece

- · Skin-friendly padding for sensitive skin
- 100% pure cotton







Version r - reinforced

· Eyelet straps reinforced for higher demands





* Span width of bed belts (for attachment to the bed): approx. measurements of the attached bed belt

Products with Velcro[®]:

Not a restraint – note: some jurisdictions consider Velcro® products as a restraint, should the patient not be able to remove them without help.



SEGUFX*-Magnetic Lock black / segufix.com

Item 1206

For secure closing of the SEGUFIX®-Systems



SEGUFX*-Magnetic Key red

Item 1208

For quick release of the SEGUFIX®-Magnetic Lock black / segufix.com



SEGUF X°-Magnetic Key red with attachment for key ring

Item 1209

For quick release of the SEGUFIX®-Magnetic Key black / segufix.com



SEGUFX*-Magnetic Button black / segufix.com

Item 1106

Component part of the SEGUFIX®-Magnetic Lock black / segufix.com



SEGUFX*-Metal Pin

Item 1117

Component part of the SEGUFIX®-Magnetic Lock black / segufix.com



SEGUFX -Patent Twist Lock green

Item 1210

For secure closing of the SEGUFIX®-System



SEGUFX -Patent Twist Key yellow

Item 1212

For quick release of the SEGUFIX®-Patent Twist Lock green



SEGUF² X°-Patent Twist Button green

Item 1110

Component part of the SEGUFIX®-Patent Twist Lock green



SEGUFX -Square Pin

Item 1111

Component part of the SEGUFIX®-Patent Twist Lock green



SEGUFIX®-Magnetic **Locking System black**

- Magnetic safety locking system (special mechanism)
- For secure and quick locking of the SEGUFIX®-Systems
- High tensile strength




SEGUFIX®-Patent Twist Locking System green

- Magnetic safety locking system (special mechanism)
- locking of the SEGUFIX®-Systems
- Coded magnetic key



Push Locking System metal

- A safety lock for all applications that do not allow the use of magnets
- For secure and quick locking of the SEGUFIX®-Systems
- High tensile strength



See price list on page 3 for all prices



Push Lock

Item 1213

- For closing of the SEGUFIX®-System
- Without magnetic mechanism
- Compatible for use on pacemaker patients



Push Lock Key

Item 1215

For release of the Push Lock



Push Button

Item 1113

Component part of the Push Lock



Push Pin

Item 1114

Component part of the Push Lock

Item 1106 - 1215

Instructions for Care

• SEGUFIX®-Restraints (white) are made of a cotton/rayon mix and are washable in hot wash cycles up to 95°C. Lower temperature and laundry nets will prolong product life.

Avoid methods that might bend metal parts of the system (e.g. laundry line, dry pressing, rotary irons), eyelets may be damaged.

Not pre-washed, up to 8 % shrinkage.

Store in a dry place.

Detergents: non-aggressive, no fabric softener, no bleach.

Dryer: delicate cycle at low temperature and preferably in the laundry net.

<u>Disinfection</u>: may be disinfected using chemothermal disinfection washing procedure (item 3.1.2 "catalogue of tested and approved disinfectants and disinfection procedures" published by the Robert-Koch-Institute). Overdosing can damage the product.

• SEGUFIX®-Transport Belts (coloured/grey/black) are made of polyester and are washable in warm wash cycles up to 30°C.

Avoid methods that might bend metal parts of the system (e.g. laundry line, dry pressing, rotary irons), eyelets may be damaged.

Store in a dry place.

Detergents: non-aggressive, no fabric softener, no bleach.

Dryer: delicate cycle at low temperature and preferably in the laundry net.

- SEGUFIX®-Locks and metal pins: remove all locks and metal pins before washing or drying. Laundering
 will damage locks and possibly cause them to fail. Soiled locks may be cleaned with a damp cloth. Never
 submerge locks in any type of liquid.
- Velcro® Fastener: fasten before washing and drying to prevent lint buildup.
 Occasionally use a stiff brush to remove lint from Velcro® Fastener. Even with normal use, Velcro® material has the tendency to collect lint. This can reduce the grip strength.
 Before each use, test grip strength of the Velcro® Fastener.
- **Durability** depends on the intensity of use and is prolonged by gentle laundry procedures (detergent/laundry net).
- SEGUFIX®-Sheepskin products:

Washing machine: washable at warm wash cycles up to 30 - 40°C, no spin-cycle.

Use only wool or delicate detergents.

<u>Hand washing</u>: wash quickly in lukewarm water (30 - 40°C), rinse thoroughly with lukewarm water and gently wring-out water.

Use only wool or delicate detergents

How to dry the sheepskin: hang dry or tumble dry on delicate cycle at low temperature.

Caution: avoid direct sunlight!

Before the sheepskin is completely dry, pull to reshape it. If needed, brush with a sturdy brush. Note: do not leave sheepskin submerged for an extended period of time (do not soak).



Custom-made products:

As developer and inventor of the SEGUFIX®-Systems we gladly design and manufacture products according to your specifications.



Laundry Net:

The SEGUFIX®-Laundry Net protects the strap material during the wash cycle. For more information see pages 27 and 47.



Item 2221 / 2321 / 2421

SEGUFX*-Standard with Crotch Strap

Intended use

- Patient restraint and positioning system in bed
- Physically restraining patients

Consisting of:

1 SEGUFIX®-Standard with Crotch Strap and integrated Side Positioning Straps

3 SEGUFIX®-Locks 2 SEGUFIX®-Keys

Sizes: XS** / S / M / L / XL / XXL** **Versions:** Basic version / b / e / f / r

Component part: Item 2121 (lock and key not included)





SEGUFIX®-Standard with Crotch Strap – Select one of three locking systems:

Item 2221

Standard with Crotch Strap

Magnetic Locking System black

Item 2321

Standard with Crotch Strap

Patent Twist Locking System green

Item 2421

Standard with Crotch Strap

Push Locking System metal

Versions				
Basic version	(no letter code)			
f = fleece	skin-friendly padding, 100% pure cotton			
r = reinforced	eyelet straps reinforced for higher demands			

Span width* of bed belts (for attachment to the bed)					
Identification	Bed belt	Eyelet straps	Velcro [®] belts		
b	short	1000 - 1200 mm 39.4 - 47.2 inches	920 - 1330 mm 36.2 - 52.4 inches		
without	medium	1200 - 1450 mm 47.2 - 57.1 inches	950 - 1540 mm 37.4 - 60.6 inches		
е	long	1450 - 1700 mm 57.1 - 66.9 inches	950 - 1800 mm 37.4 - 70.9 inches		

^{*} Width: approx. measurements of the attached product (about 8% shrinkage possible)

	Size guide*						
Size	Waist girth	Waist belt 1	Bed belt 2				
XS**	400 - 600 mm	90 mm	140 mm				
	15.8 - 23.6 inches	3.5 inches	5.5 inches				
S	520 - 820 mm	140 mm	180 mm				
	20.5 - 32.3 inches	5.5 inches	7.1 inches				
М	800 - 1200 mm	180 mm	180 mm				
	31.5 - 47.2 inches	7.1 inches	7.1 inches				
L	1160 - 1560 mm	180 mm	180 mm				
	45.7 - 61.4 inches	7.1 inches	7.1 inches				
XL	1360 - 1800 mm	180 mm	180 mm				
	53.5 - 70.9 inches	7.1 inches	7.1 inches				
XXL**	1560 - 1980 mm	180 mm	180 mm				
	61.4 - 78.0 inches	7.1 inches	7.1 inches				

^{*} approximate measurements - about 8% shrinkage possible (products are not pre-washed)



Item 2721

SEGUFX -Standard with Crotch Strap Velcro®

Intended use:

- Positioning aid in bed, provides support for patients who feel insecure
- Not a restraint (note: some jurisdictions consider Velcro® products as a restraint, should the patient not be able to remove them without help)

Consisting of:

1 SEGUFIX®-Standard with Crotch Strap Velcro® and integrated Side Positioning Straps

Sizes: S / M / L

Versions: Basic version / b / e





^{**} sizes XS and XXL on request



Item 2222 / 2322 / 2422

SEGUFX*-Complete with Crotch Strap

Intended use:

- 5-point-restraint
- Physically restraining patients

Consisting of:

- 1 SEGUFIX®-Standard with Crotch Strap
- 1 SEGUFIX®-Shoulder Restraint
- 1 SEGUFIX®-Hand Restraint (with 2 Hand Straps)
- 1 SEGUFIX®-Foot Restraint (with 2 Foot Straps)

Total included:

11 SEGUFIX®-Locks 2 SEGUFIX®-Keys

Sizes: S / M / L

Versions: Basic version / b / e / r





SEGUFIX®-Complete with Crotch Strap – Select one of three locking systems:

Item 2222

Complete with Crotch Strap



Magnetic Locking System black

Item 2322

Complete with Crotch Strap

Patent Twist Locking System green

Item 2422

Complete with Crotch Strap

Push Locking System metal

	Size guide*						
Size	Waist girth	Wrist girth	Ankle girth				
S	520 - 820 mm	120 - 190 mm	170 - 250 mm				
	20.5 - 32.3 inches	4.7 - 7.5 inches	6.7 - 9.8 inches				
М	800 - 1200 mm	160 - 240 mm	220 - 300 mm				
	31.5 - 47.2 inches	6.3 - 9.5 inches	8.7 - 11.8 inches				
L	1160 - 1560 mm	220 - 290 mm	270 - 330 mm				
	45.7 - 61.4 inches	8.7 - 11.4 inches	10.6 - 13.0 inches				

^{*} approximate measurements - about 8% shrinkage possible (products are not pre-washed)

	Versions
Basic version	(no letter code)
r = reinforced	eyelet straps reinforced for higher demands

Span w	Span width* of bed belts (for attachment to the bed)				
Identification	Bed belt	Eyelet straps	Velcro [®] belts		
b	short	1000 - 1200 mm 39.4 - 47.2 inches	920 - 1330 mm 36.2 - 52.4 inches		
without	medium	1200 - 1450 mm 47.2 - 57.1 inches	950 - 1540 mm 37.4 - 60.6 inches		
е	long	1450 - 1700 mm 57.1 - 66.9 inches	950 - 1800 mm 37.4 - 70.9 inches		

^{*} Width: approx. measurements of the attached product (about 8% shrinkage possible)



Standard with Crotch Strap (Item 2221) and Shoulder Restraint (Item 2203)



Thigh Restraint (Item 2211) and Shoulder Additional Belt (Item 2212)



(Example of use with Magnetic Locking System black)





Item 2231 / 2331 / 2431

SEGUFX*-Standard with Thigh Straps

Intended use:

- Patient restraint and positioning system in bed
- Physically restraining patients

Consisting of:

1 SEGUFIX®-Standard with Thigh Straps and integrated Side Positioning Straps

5 SEGUFIX®-Locks 2 SEGUFIX®-Keys

Sizes: S / M / L / XL

Versions: Basic version / b / e / f / r

Component part: Item 2131 (lock and key not included)





SEGUFIX®-Standard with Thigh Straps - Select one of three locking systems:

Item 2231

Standard with
Thigh Straps

Magnetic Locking System black

Item 2331

Standard with Thigh Straps

Patent Twist Locking System green

Item 2431

Standard with Thigh Straps

Push Locking System metal

Versions				
Basic version	(no letter code)			
f = fleece	skin-friendly padding, 100% pure cotton			
r = reinforced	eyelet straps reinforced for higher demands			

Span width* of bed belts (for attachment to the bed)					
Identification	Bed belt	Eyelet straps	Velcro [®] belts		
b	short	1000 - 1200 mm 39.4 - 47.2 inches	920 - 1330 mm 36.2 - 52.4 inches		
without	medium	1200 - 1450 mm 47.2 - 57.1 inches	950 - 1540 mm 37.4 - 60.6 inches		
е	long	1450 - 1700 mm 57.1 - 66.9 inches	950 - 1800 mm 37.4 - 70.9 inches		

^{*} Width: approx. measurements of the attached product (about 8% shrinkage possible)

Size guide*			
Size	Waist girth	Waist belt 1	Bed belt 2
S	520 - 820 mm	140 mm	180 mm
	20.5 - 32.3 inches	5.5 inches	7.1 inches
М	800 - 1200 mm	180 mm	180 mm
	31.5 - 47.2 inches	7.1 inches	7.1 inches
L	1160 - 1560 mm	180 mm	180 mm
	45.7 - 61.4 inches	7.1 inches	7.1 inches
XL	1360 - 1800 mm	180 mm	180 mm
	53.5 - 70.9 inches	7.1 inches	7.1 inches

^{*} approximate measurements - about 8% shrinkage possible (products are not pre-washed)

Size	Thigh girth*		
S	380 - 520 mm	15.0 - 20.5 inches	
М	500 - 720 mm	19.7 - 28.4 inches	
L	580 - 880 mm	22.8 - 34.7 inches	
XL	850 - 1150 mm	33.5 - 45.3 inches	



Item 2731

SEGUFX -Standard with Thigh Straps Velcro

Intended use:

- Positioning aid in bed, provides support for patients who feel insecure
- Not a restraint (note: some jurisdictions consider Velcro® products as a restraint, should the patient not be able to remove them without help)

Consisting of:

1 SEGUFIX®-Standard with Thigh Straps Velcro® and integrated Side Positioning Straps

Sizes: S / M / L

Versions: Basic version / b / e







Item 2232 / 2332 / 2432

SEGUFX*-Complete with Thigh Straps

Intended use:

- 5-point-restraint
- Physically restraining patients

Consisting of:

- 1 SEGUFIX®-Standard with Thigh Straps
- 1 SEGUFIX®-Shoulder Restraint
- 1 SEGUFIX®-Hand Restraint (with 2 Hand Straps)
- 1 SEGUFIX®-Foot Restraint (with 2 Foot Straps)

Total included:

13 SEGUFIX®-Locks 2 SEGUFIX®-Keys

Sizes: S / M / L

Versions: Basic version / b / e / r





SEGUFIX®-Complete with Thigh Straps - Select one of three locking systems:

Item 2232

Complete with Thigh Straps



Magnetic Locking System black

Item 2332

Complete with Thigh Straps

Patent Twist Locking System green

Item 2432

Complete with Thigh Straps

Push Locking System metal

		Size guide*	
Size	Waist girth	Wrist girth	Ankle girth
S	520 - 820 mm	120 - 190 mm	170 - 250 mm
	20.5 - 32.3 inches	4.7 - 7.5 inches	6.7 - 9.8 inches
М	800 - 1200 mm	160 - 240 mm	220 - 300 mm
	31.5 - 47.2 inches	6.3 - 9.5 inches	8.7 - 11.8 inches
L	1160 - 1560 mm	220 - 290 mm	270 - 330 mm
	45.7 - 61.4 inches	8.7 - 11.4 inches	10.6 - 13.0 inches

* approximate measurements - about 8%	shrinkage possible
(products are not pre-washed)	

Size	Thigh girth*			
S	380 - 520	mm	15.0	- 20.5 inches
М	500 - 720	mm	19.7	- 28.4 inches
L	580 - 880	mm	22.8	- 34.7 inches

Versions				
Basic version	(no letter code)			
r = reinforced	eyelet straps reinforced for higher demands			

Span width* of bed belts (for attachment to the bed)				
Identification	Bed belt	Eyelet straps		
b	short	1000 - 1200 mm	39.4 - 47.2 inches	
without	medium	1200 - 1450 mm	47.2 - 57.1 inches	
е	long	1450 - 1700 mm	57.1 - 66.9 inches	

* Width: approx. measurements of the attached product (about 8% shrinkage possible)



Standard with Thigh Straps (Item 2231)



Standard with Thigh Straps (Item 2231) and Shoulder Restraint (Item 2203)

(Example of use with Magnetic Locking System black)



Item 2203 / 2303 / 2403







SEGUFX*-Shoulder Restraint

Intended use:

- Prevents the patient from sliding up out of the SEGUFIX®-Standard
- Physically restraining patients

Requirements:

SEGUFIX®-Standard with Crotch Strap or Standard with Thigh Straps

Consisting of:

- 1 SEGUFIX®-Shoulder Strap
- 2 SEGUFIX®-Locks

SEGUFIX®-Keys not included

Sizes: XS / S / M / L

Versions: Basic version / r



Item 2103

(lock and key not included)





Size	Belt a	Belt b
XS	600 mm 23.6 inches	770 mm 30.3 inches
S	860 mm 33.9 inches	1190 mm 46.9 inches
М	1010 mm 39.8 inches	1450 mm 57.1 inches
	1170 mm	1650 mm

46.1 inches

SEGUFIX®-Shoulder Restraint – Select one of three locking systems:

Item 2203

Shoulder Restraint Magnetic



Item 2303

Shoulder Restraint Patent Twist Locking System green





Item 2403

Shoulder Restraint

Push

Locking System metal

See versions on page 21

65.0 inches



Item 2212 / 2312 / 2412

Compatible with SEGUFIX®-

- Shoulder Restraint (not compatible with size XS)
- Quick Restraint Shoulder
- Stretcher Restraint Shoulder
- Compact

SEGUFX*-Shoulder Additional Belt

Intended use:

- Prevents the patient from sitting up in bed
- Physically restraining patients (requires continous monitoring)

Requirements:

- SEGUFIX®-Standard with Crotch Strap or Standard with Thigh Straps
- SEGUFIX®-Shoulder Restraint

Total length: approx. 1140 mm* / 44.9 inches*

Consisting of:

- 2 SEGUFIX®-Shoulder Additional Straps
- 2 SEGUFIX®-Locks

SEGUFIX®-Keys not included

Versions: Basic version / r

Component part: Item 2112 (lock and key not included)





SEGUFIX®-Shoulder Additional Belt – Select one of three locking systems:

Item 2212

Shoulder

Additional Belt

Magnetic Locking System black

Item 2312

Shoulder Additional Belt



Patent Twist Locking System green

Item 2412

Shoulder Additional Belt

Push Locking System metal



^{*} approximate measurements - about 8% shrinkage possible (products are not pre-washed)



Item 2204 / 2304 / 2404

Wrist girth*				
S	120 - 190 mm	4.7 - 7.5 inches		
М	160 - 240 mm	6.3 - 9.5 inches		
L	220 - 290 mm	8.7 -11.4 inches		

SEGUF X°-Hand Restraint

Intended use:

- Adjustable restraint of one or both hands in bed
- Physically restraining patients

Requirements:

SEGUFIX®-Standard with Crotch Strap or Standard with Thigh Straps

Consisting of:

- 2 SEGUFIX®-Hand Straps
- 2 SEGUFIX®-Locks
- SEGUFIX®-Keys not included

Sizes: S / M / L

Versions: Basic version / r

Component part: Item 2104 (1 Hand Strap)

(lock and key not included)





SEGUFIX®-Hand Restraint – Select one of three locking systems:

Item 2204

Hand Restraint Magnetic



Item 2304

Hand Restraint Patent Twist


Locking System green



Hand Restraint

Push

Locking System metal



* approximate measurements - about 8% shrinkage possible (products are not pre-washed)



Item 2224 / 2324 / 2424

	Wrist g	irth*	
S	120 - 190 mm	4.7 -	7.5 inches
М	160 - 240 mm	6.3 -	9.5 inches
L	220 - 290 mm	8.7 -1	1.4 inches

SEGUFX®-Hand Restraint lengthened

Intended use:

- Adjustable restraint of one or both hands in bed
- Physically restraining patients

For use without SEGUFIX®-Standard with Crotch Strap or Standard with Thigh Straps

Consisting of:

- 2 SEGUFIX®-Hand Straps lengthened
- 4 SEGUFIX®-Locks
- 1 SEGUFIX®-Key

Sizes: S / M / L

Versions: Basic version / r

Component part: Item 2124 (1 Hand Strap)

Patent Twist Locking System green

(lock and key not included)





SEGUFIX®-Hand Restraint lengthened - Select one of three locking systems:

Item 2224

lengthened



Item 2324

Hand Restraint lengthened



Hand Restraint lengthened

Item 2424



Push Locking System metal



Item 2205 / 2305 / 2405

Ankle girth*				
S	170 - 250 mm	6.7 - 9.8 inches		
М	220 - 300 mm	8.7 -11.8 inches		
L	270 - 330 mm	10.6 -13.0 inches		

SEGUF X°-Foot Restraint

Intended use:

- Gradually adjustable restraint from loose to tight of one or both feet in bed
- Physically restraining patients

Consisting of:

- 2 SEGUFIX®-Foot Straps
- 1 SEGUFIX®-Connecting Belt
- 4 SEGUFIX®-Locks SEGUFIX®-Keys not included

Sizes: S / M / L

Versions: Basic version / b / e / r

Component parts: (lock and key not included)

Item 2105: 1 Foot Strap Item 2005: Connecting Belt





SEGUFIX®-Foot Restraint – Select one of three locking systems:

Item 2205

Foot Restraint Magnetic

Locking System black

Item 2305

Foot Restraint Patent Twist

Locking System green

Item 2405

Foot Restraint Push

Locking System metal

^{*} approximate measurements - about 8% shrinkage possible (products are not pre-washed)

Span width* of bed belts (for attachment to the bed)				
Identification	Bed belt	Eyelet straps		
b	short	1000 - 1200 mm	39.4 - 47.2 inches	
without	medium	1200 - 1450 mm	47.2 - 57.1 inches	
е	long	1450 - 1700 mm	57.1 - 66.9 inches	

^{*} Width: approx. measurements of the attached product (about 8% shrinkage possible)





To further restrict movement, the SEGUFIX®-Brace Strap for legs may be used (see page 27).



Item 2211 / 2311 / 2411

		Thigh g	girth*
	S	200 - 360 mm	7.9 -14.2 inches
	Μ	340 - 580 mm	13.4 -22.8 inches
ĺ	L	580 - 750 mm	22.8 -29.5 inches

SEGUFX*-Thigh Restraint

Intended use:

- Limits movement of the legs in bed
- Optional addition to a 5-point-restraint
- Physically restraining patients

Consisting of:

- 1 SEGUFIX®-Thigh Belt (for both thighs)
- 4 SEGUFIX®-Locks SEGUFIX®-Keys not included

Sizes: S / M / L

Versions: Basic version / b / e / r

Component part: Item 2111 (lock and key not included)





SEGUFIX®-Thigh Restraint - Select one of three locking systems:

Item 2211

Thigh Restraint Magnetic Locking System black




Thigh Restraint Patent Twist Locking System green

Item 2311



Item 2411

Thigh Restraint Push



See price list on pages 3, 5 and 6 for all sizes, prices and versions

Products with Velcro® Fastener

For SEGUFIX®-Standard with Crotch Strap Velcro® or Standard with Thigh Straps Velcro® refer to pages 16 and 18



Item 2724

Wrist girth*					
М	160 - 240 mm	6.3 - 9.5 inches			

SEGUFX*-Hand Restraint lengthened Velcro*

Intended use

- Positioning of one or both hands in bed
- Also compatible with ambulance stretchers
- Not a restraint (note: some jurisdictions consider Velcro® products as a restraint, should the patient not be able to remove them without help)

For use without SEGUFIX®-Standard with Crotch Strap/Standard with Thigh Straps

Consisting of:

2 SEGUFIX®-Hand Straps lengthened with Velcro® Fastener / Buckle Lock

Size: M

Component part: Item 2824 (1 Hand Strap)







Item 2705

	Ankle g	girtii
S 1	70 - 250 mm	6.7 - 9.8 inches
M 2	20 - 300 mm	8.7 -11.8 inches

SEGUFX*-Foot Restraint Velcro*

Intended use:

- Gradual positioning from loose to tight of one or both feet in bed
- Not a restraint (note: some jurisdictions consider Velcro® products as a restraint, should the patient not be able to remove them without help)

Consisting of:

2 SEGUFIX®-Foot Straps with Velcro® Fastener / Buckle Lock 1 SEGUFIX®-Connecting Belt with Buckle Lock

OLGOTIA Confidenting Boil Will Be

Sizes: S / M

Versions: Basic version / b / e

Component parts:

Item 2805: 1 Foot Strap Item 2905: Connecting Belt





* approximate measurements - about 8% shrinkage possible (products are not pre-washed)

Span width* of bed belts (for attachment to the bed)						
Bed belt	Velcro [®] belts					
short	920 - 1330 mm	36.2 - 52.4 inches				
medium	950 - 1540 mm	37.4 - 60.6 inches				
long	950 - 1800 mm	37.4 - 70.9 inches				
	Bed belt short medium	Bed belt Velcro belts short 920 - 1330 mm medium 950 - 1540 mm				

 Width: approx. measurements of the attached product (about 8% shrinkage possible)



Item 2711

	Thigh (girth*	
S	200 - 360 mm	7.9 -1	4.2 inches
М	340 - 580 mm	13.4 -2	22.8 inches
L	580 - 750 mm	22.8 -2	29.5 inches

SEGUFX*-Thigh Restraint Velcro*

Intended use:

- Limits movement of legs in bed
- Optional addition to a 5-point-restraint
- Not a restraint (note: some jurisdictions consider Velcro® products as a restraint, should the patient not be able to remove them without help)

Consisting of:

1 SEGUFIX®-Thigh Belt

with Velcro® Fastener / Buckle Lock (for both thighs)

Sizes: S / M / L

Versions: Basic version / b / e







Item 2217 / 2317 / 2417

Hea	d Positic	oning Belt*
Forehead Strap	Girth	480 - 800 mm 18.9 - 31.5 inches
Chin Strap	Girth	700 - 800 mm 27.6 - 31.5 inches
Positioning Strap	Length	1200 mm 47.2 inches

SEGUFX*-Head Positioning Belt

Intended use:

- To position the head in bed
- Requires continous monitoring
- Not a restraint (Note: some jurisdictions consider Velcro® products as a restraint, should the patient not be able to remove them without help)

Requirement:

- Waist restraint, 3-point- or 5-point restraint

Consisting of:

- 1 SEGUFIX®-Bed Belt with Forehead Strap
- 1 SEGUFIX®-Chin Strap
- 1 SEGUFIX®-Positioning Strap
- 2 SEGUFIX®-Locks SEGUFIX®-Keys not included

Versions: Basic version / b / e

Component part: Item 2117 (lock and key not included)





SEGUFIX®-Head Positioning Belt - Select one of three locking systems:

Item 2217

Head Positioning Belt



Magnetic Locking System black

Item 2317

Head Positioning



Patent Twist Locking System green

Item 2417

Head Positioning

Belt

Push Locking System metal

^{*} approximate measurements - about 8% shrinkage possible (products are not pre-washed)



SEGUFIX®-Head Positioning Belt

- The SEGUFIX®-Head Positioning Belt is not a restraint, but a positioning aid.
- The SEGUFIX®-Head Positioning Belt was designed to hold the patient's head in the desired position.
- Only for use in connection with other restraints (waist restraint, 3-point- or 5-point restraint), to minimize the risk of neck or spinal injury.
- The use of the SEGUFIX®-Head Positioning Belt requires continuous monitoring, especially because involuntary or voluntary movements may cause neck or spinal injuries.

Span width* of bed belts (for attachment to the bed)						
Identification Bed belt		Eyelet straps				
b	short	1000 - 1200 mm	39.4 - 47.2 inches			
without	medium	1200 - 1450 mm	47.2 - 57.1 inches			
е	long	1450 - 1700 mm	57.1 - 66.9 inches			

Width: approx. measurements of the attached product (about 8% shrinkage possible)

Note: Products with Velcro® Fastener are not a restraint (Note: some jurisdictions consider Velcro® products as a restraint, should the patient not be able to remove them without help)



Item 2250/r / 2350/r / 2450/r

SEGUF X°-Compact

Intended use:

- Patient restraint in bed
- Prevents the patient from escaping upward or downward while arms and legs remain unrestricted
- Physically restraining patients

Consisting of:

- 1 SEGUFIX®-Compact
- 7 SEGUFIX®-Locks
- 2 SEGUFIX®-Keys

Sizes: S / M / L

Versions: r / rb / re

Component part: Item 2150/r (lock and key not included)





SEGUFIX®-Compact - Select one of three locking systems:

Item 2250/r

Compact
Magnetic

Locking System black




Compact
Patent Twist

Locking System green

Item 2450/r

Compact Push

Locking System metal



			Size guide	e*		
ı	Size Torso diagonally		Chest	Waist	Thigh	
	S	1340 - 1540 mm 52.8 - 60.6 inches	480 - 880 mm 18.9 - 34.6 inches	520 - 820 mm 20.5 - 32.3inches	380 - 520 mm 15.0 - 20.5 inch	
	М	1640 - 1740 mm 64.6 - 68.5 inches	750 - 1150 mm 29.5 - 45.3 inches	800 - 1200 mm 31.5 - 47.2 inches	500 - 720 mm 19.7 - 28.4 inches	
	L	1940 - 2040 mm 76.4 - 80.3 inches	1030 - 1430 mm 40.6 - 56.3 inches	1160 - 1560 cm 45.7 - 61.4 inches	580 - 880 mm 22.8 - 34.7inch	

^{*} approximate measurements - about 8% shrinkage possible (products are not pre-washed)

Version				
r = reinforced	eyelet straps reinforced for higher demands			

Span wid	1 width* of bed belts (for attachment to the bed)			
Identification	Bed belt	Eyelet straps		
b	short	1000 - 1200 mm	39.4 - 47.2 inches	
without	medium	1200 - 1450 mm	47.2 - 57.1 inches	
е	long	1450 - 1700 mm	57.1 - 66.9 inches	

^{*} Width: approx. measurements of the attached product (about 8% shrinkage possible)



SEGUFIX®-Compact

- Full mobility of arms and legs
- Thigh straps prevent bruising in the crotch area
- Comfortable padding
- Quickly releases in case of emergency only 5 locks
- Compatible with other SEGUFIX®-products

(Example of use with Magnetic Locking System black)



Item 3240 - 3444

SEGUFX*-Extension Belt

Intended use:

- Extension belts for attachment on wider beds or backrests (Do not use SEGUFIX®-Extension Belts to alter the size of products)

Consisting of:

- 1 SEGUFIX®-Extension Belt
- 1 SEGUFIX®-Lock
- 1 SEGUFIX®-Key

Versions: Basic version / r

Component parts:

Item 3140 / 3141 / 3142 / 3143 / 3144

(lock and key not included)





SEGUFIX®-Extension Belt - Select one of three locking systems:

Item 3240 / 3241 / 3242 3243 / 3244

Extension Belt

Magnetic Locking System black

Item 3340 / 3341 / 3342

3343 / 3344

Extension Belt

Patent Twist Locking System green

Item 3440 / 3441 / 3442

3443 / 3444

Extension Belt

Push Locking System metal

Versions				
Basic version	(no letter code)			
r = reinforced	eyelet straps reinforced for higher demands			

Extension Belt	3240 3340 3440 3140	3241 3341 3441 3141	3242 3342 3442 3142	3243 3343 3443 3143	3244 3344 3444 3144
Total length*	650 mm 25.6 inche	650 mm 25.6 inches	650 mm 25.6 inches	650 mm 25.6 inches	1200 mm 47.2 inches
Metal loops	2	2	1	1	0
12 eyelets	X	X	X	Χ	-
24 eyelets	_	-	_	_	X
Pin pocket	X	_	X	_	_

^{*} approximate measurements - about 8% shrinkage possible (products are not pre-washed)



Item 3745

SEGUFX*-Extension Belt with Snap Lock

Intended use:

 Extends attaching straps of SEGUFIX-Chair Belts with Snap Lock to fit wider backrests

Compatible with:

- SEGUFIX®-Chair Belt Velcro®
- SEGUFIX®-Chair Belt
- SEGUFIX®-Chair Belt with Crotch Strap
- SEGUFIX®-Chair Belt with Thigh Straps


Only compatible with Snap Lock products

Total length: approx. 800 mm* / 31.5 inches*

Consisting of:

1 SEGUFIX®-Extension Belt with Snap Lock





Item 3110/r

SEGUF[¥]X[®]-Brace Strap for legs

Intended use:

- Further restricts movement of legs
- Physically restraining patients

Compatible with:

- SEGUFIX°-Foot RestraintSEGUFIX°-Thigh Restraint
- SEGUFIX®-Quick Restraint Foot

Total length: 1240 mm* / 48.8 inches*

Consisting of:

1 SEGUFIX®-Brace Strap SEGUFIX®-Lock not included SEGUFIX®-Key not included





* approximate measurements - about 8% shrinkage possible (products are not pre-washed)

	Version
r = reinforced	eyelet straps reinforced for higher demands



To further restrict movement, the SEGUFIX®-Brace Strap for legs (Item 3110/r) may be used in combination with:

- SEGUFIX®-Foot Restraint (see page 22)
- SEGUFIX®-Thigh Restraint (see page 22)
- SEGUFIX®-Quick Restraint Foot (see page 29)



SEGUFX*-Laundry Net

Intended use:

Protects SEGUFIX® products during wash cycle

Size: approx. 600 x 400 mm* / 23.6 x 15.8 inches*

Consisting of:

1 SEGUFIX®-Laundry Net with integrated drawstring





Item 8022

^{*} approximate measurements - not pre-washed



Item 4213/r / 4313/r / 4413/r

	Chest g	jirth*
S	430 - 740 mm	16.9 - 29.1 inches
М	740 -1140 mm	29.1 - 44.9 inches
L	920 -1320 mm	36.2 - 52.0 inches
XL	1360 - 1780 mm	53.5 - 70.0 inches

SEGUFX*-Quick Restraint Shoulder

Intended use:

- Patient restraint in bed, short term
- Physically restraining patients

Requirements:

- SEGUFIX®-Quick Restraint Hand
- SEGUFIX®-Quick Restraint Foot

Consisting of:

1 SEGUFIX®-Quick Strap Shoulder

5 SEGUFIX®-Locks

SEGUFIX®-Keys not included

Sizes: S / M / L / XL

Versions: r / rb / re

Component part: Item 4113/r (lock and key not included)





SEGUFIX®-Quick Restraint Shoulder - Select one of three locking systems:

Item 4213/r

Quick Restraint Shoulder

Magnetic Locking System black

Item 4313/r

Quick Restraint Shoulder

Patent Twist Locking System green

Item 4413/r

Quick Restraint Shoulder

Push Locking System metal

^{*} approximate measurements - about 8% shrinkage possible (products are not pre-washed)

	Version
r = reinforced	eyelet straps reinforced for higher demands

Span width* of bed belts (for attachment to the bed)			
Identification	Bed belt	Eyelet straps	
b	short	1000 - 1200 mm	39.4 - 47.2 inches
without	medium	1200 - 1450 mm	47.2 - 57.1 inches
е	long	1450 - 1700 mm	57.1 - 66.9 inches

 ^{*} Width: approx. measurements of the attached product (about 8% shrinkage possible)



Item 4214/r / 4314/r / 4414/r

	Wrist	girth*
S	120 - 190 mm	4.7 - 7.5 inches
М	160 - 240 mm	6.3 - 9.5 inches
L	220 - 290 mm	8.7 - 11.4 inches

SEGUFX -Quick Restraint Hand

Intended use:

- Patient restraint of one or both hands in bed, short term
- Physically restraining patients

Consisting of:

- 1 SEGUFIX®-Quick Strap Hand (for both hands)
- 4 SEGUFIX®-Locks
- 1 SEGUFIX®-Key

Sizes: S / M / L

Versions: r / rb / re

Component part: Item 4114/r (lock and key not included)





SEGUFIX®-Quick Restraint Hand – Select one of three locking systems:

Item 4214/r

Quick Restraint Hand

папи

Magnetic Locking System black

Item 4314/r

Quick Restraint

Hand

Patent Twist Locking System green

Item 4414/r

Quick Restraint

Hand

Push Locking System metal

Item 6040 - 6760

Accessories/Sheepskin Item 8010 - 8022

Item 4215/r / 4315/r / 4415/r

	Ankle	girth*
S	170 - 250 mm	6.7 - 9.8 inches
М	220 - 300 mm	8.7 - 11.8 inches
L	270 - 330 mm	10.6 - 13.0 inches

SEGUFX -Quick Restraint Foot

Intended use:

- Patient restraint of one or both feet in bed, short term
- Physically restraining patients

Consisting of:

- 1 SEGUFIX®-Quick Strap Foot (for both feet)
- 4 SEGUFIX®-Locks
- 1 SEGUFIX®-Key

Sizes: S / M / L

Versions: r / rb / re

Component part: Item 4115/r (lock and key not included)





SEGUFIX®-Quick Restraint Foot – Select one of three locking systems:

Item 4215/r

Quick Restraint

Foot

Magnetic Locking System black

Item 4315/r

Quick Restraint

Foot

Patent Twist Locking System green



Quick Restraint

Foot

Push Locking System metal

^{*} approximate measurements - about 8% shrinkage possible (products are not pre-washed)

	Version
r = reinforced	eyelet straps reinforced for higher demands

Span width* of bed belts (for attachment to the bed)			
Identification	Bed belt	Eyelet straps	
b	short	1000 - 1200 mm	39.4 - 47.2 inches
without	medium	1200 - 1450 mm	47.2 - 57.1 inches
е	long	1450 - 1700 mm	57.1 - 66.9 inches

^{*} Width: approx. measurements of the attached bed belt (about 8% shrinkage possible)




Optional additions for the SEGUFIX®-Quick Restraint System include:



SEGUFIX®-Shoulder Additional Belt (Item 2212) page 20



SEGUFIX®-Thigh Restraint (Item 2211) page 22



SEGUFIX®-Brace Strap for legs (Item 3110/r) page 27

(Example of use with Magnetic Locking System black)



Item 5243 / 5343 / 5443

	Chest g	jirth*
S	430 - 740 mm	16.9 - 29.1 inches
М	740 -1140 mm	29.1 - 44.9 inches
L	920 -1320 mm	36.2 - 52.0 inches

SEGUFX*-Stretcher Restraint Shoulder

Intended use:

- To secure patients on stretchers
- Also compatible with ambulance services
- Physically restraining patients

Requirements:

- SEGUFIX®-Hand Restraint lengthened
- SEGUFIX®-Stretcher Restraint Foot

Width of stretcher: approx. 400 to 800 mm / 15.8 to 31.5 inches

Consisting of:

- 1 SEGUFIX®-Stretcher Strap Shoulder
- 3 SEGUFIX®-Locks
- 1 SEGUFIX®-Key

Sizes: S / M / L

Component part: Item 5143 (lock and key not included)





SEGUFIX®-Stretcher Restraint Shoulder - Select one of three locking systems:

Item 5243

Stretcher Restraint Shoulder



Magnetic Locking System black

Item 5343

Stretcher Restraint



Patent Twist Locking System green

Item 5443

Stretcher Restraint

Shoulder

Push Locking System metal

^{*} approximate measurements - about 8% shrinkage possible (products are not pre-washed)



Item 2724

	Wrist g	ırth^
М	160 - 240 mm	6.3 - 9.5 inches

SEGUFX*-Hand Restraint lengthened Velcro*

Intended use:

- Positioning of one or both hands on stretchers
- Also compatible for ambulance services
- Not a restraint (note: some jurisdictions consider Velcro® products as a restraint, should the patient not be able to remove them without help)

Consisting of:

2 SEGUFIX®-Hand Straps lengthened with Velcro® Fastener / Buckle Lock

Size: M

Component part: Item 2824 (1 Hand Strap)







Item 5745

	Ankie	igiπn"
М	220 - 300 mm	8.7 - 11.8 inches

SEGUFX -Stretcher Restraint Foot Velcro

Intended use:

- Positioning of one or both feet on stretchers
- Also compatible for ambulance services
- Not a restraint (note: some jurisdictions consider Velcro® products as a restraint, should the patient not be able to remove them without help)

Width of stretcher: approx. 400 to 800 mm / 15.8 to 31.5 inches

Consisting of:

1 SEGUFIX®-Stretcher Strap Foot (for both feet) with Velcro® Fastener / Buckle Lock

Size: M







Item 2224 / 2324 / 2424

will g	irth*
120 - 190 mm	4.7 - 7.5 inches
160 - 240 mm	6.3 - 9.5 inches
220 - 290 mm	8.7 -11.4 inches
	160 - 240 mm

SEGUFX -Hand Restraint lengthened

Intended use:

- Adjustable restraint of one or both hands on stretchers
- Physically restraining patients

Consisting of:

- 2 SEGUFIX®-Hand Straps lengthened
- 4 SEGUFIX®-Locks
- 1 SEGUFIX®-Key

Sizes: S / M / L

Versions: Basic version / r

Component part: Item 2124 (1 Hand Strap)

(lock and key not included)



SEGUFIX®-Hand Restraint lengthened – Select one of three locking systems:

Item 2224

Hand Restraint lengthened

Magnetic Locking System black

Item 2324

Hand Restraint lengthened

Patent Twist Locking System green

Item 2424

Hand Restraint lengthened

Push Locking System metal

√95°

* approximate measurements - about 8% shrinkage po	ossible	
(products are not pre-washed)		

Versions		
Basic version	(no letter code)	
r = reinforced	eyelet straps reinforced for higher demands	



Item 5245 / 5345 / 5445

Ankle girth*				
М	220 - 300 mm	8.7 - 11.8 inches		

SEGUFX*-Stretcher Restraint Foot

Intended use:

- Restraint of one or both feet on stretchers
- Also compatible with ambulance services
- Physically restraining patients

Width of stretcher: approx. 400 to 800 mm / 15.8 to 31.5 inches

Consisting of:

- 1 SEGUFIX®-Stretcher Strap Foot (for both feet)
- 2 SEGUFIX®-Locks SEGUFIX®-Key not included

Size: M

Component part: Item 5145 (lock and key not included)





SEGUFIX®-Stretcher Restraint Foot – Select one of three locking systems:

Foot

Item 5245

Stretcher Restraint Foot



Magnetic Locking System black

Item 5345

Stretcher Restraint



Patent Twist Locking System green

Item 5445

Stretcher Restraint



Push Locking System metal



The SEGUFIX®-Stetcher Retraint Complete consists of:

- SEGUFIX®-Stretcher Restraint Shoulder (Item 5243) (Example of use with Magnetic Locking System black)
- SEGUFIX®-Stretcher Restraint Foot Velcro® (Item 5745)
- SEGUFIX®-Hand Restraint lengthened Velcro® (Item 2724)



Item 5204/r / 5304/r / 5404/r

Photo: Thightly attached Hand Straps to the Restraint Belt (shown in front of the stomach)

SEGUFX -Hand Waist Restraint

Intended use:

- To restrain hands of patients during transfer (use of the Hand Waist Restraint requires continuous monitoring)
- Prevents patients from injuring themselves or others, e. g. accompanying personnel during transfer
- Physically restraining patients

Consisting of:

- 1 SEGUFIX®-Restraint Belt
- 2 SEGUFIX®-Hand Straps
- 3 SEGUFIX®-Locks
- 2 SEGUFIX®-Keys

Sizes: S / M / L / XL

Component parts: (lock and key not included)

Item 5101/r: Restraint Belt Item 5104/r: 1 Hand Strap





SEGUFIX®-Hand Waist Restraint - Select one of three locking systems:

Item 5204/r

Hand Waist Restraint

Magnetic Locking System black

Item 5304/r

Hand Waist

Restraint

Patent Twist Locking System green

Item 5404/r

Hand Waist

Restraint





Loosely attached (shown in front of the stomach)



Thightly attached (shown behind the back)



Loosely attached (shown behind the back)

(Example of use with Magnetic Locking System black)

Size guide*			
Size	Waist girth	Wrist girth	
S	520 - 820 mm 20.5 - 32.3 inches	120 - 190 mm 4.7 - 7.5 inches	
М	800 - 1200 mm 31.5 - 47.2 inches	160 - 240 mm 6.3 - 9.5 inches	
L	1160 - 1560 mm 45.7 - 61.4 inches	220 - 290 mm 8.7 - 11.4 inches	
XL	1360 - 1800 mm 53.4 - 70.9 inches	260 - 360 mm 10.2 - 14.2 inches	

^{*}approximate measurements - about 8% shrinkage possible (products are not pre-washed)

Version

r = reinforced

eyelet straps reinforced for higher demands



SEGUFIX®-Hand Waist Restraint (Item 5204/r)



SEGUFIX®-Hand Waist Restraint (Item 5204/r), SEGUFIX®-Backrest Strap (Item 6730) and SEGUFIX®-Transport Waist Belt (Item 6216)

(Example of use with Magnetic Locking System black)

SEGUFIX®-Hand Waist Restraint

Intended use:

Prevents patients from injuring themselves or others,

e. g. accompanying personnel.

Attention:

The SEGUFIX®-Transport System does not replace the vehicles own seat belt system. The SEGUFIX®-Transport Belts may only be used as additional support or positioning of the patient.



Item 5218 / 5318 / 5418



SEGUFX*-Restraining Aid

Intended use:

- Provides assistance while restraining patients on stretchers.

 After the restraint is applied, the SEGUFIX®-Restraining Aid may be removed.
- Additional stabilization of the patient
- Can also be fastened above the knees
- Also compatible for ambulance services
- Physically restraining patients

Attachment to the stretcher with a Lock

Consisting of:

- 1 SEGUFIX®-Restraining Aid
- 2 SEGUFIX®-Locks SEGUFIX®-Key not included

Component part: Item 5118 (lock and key not included)







SEGUFIX®-Restraining Aid – Select one of three locking systems:

Item 5218

Restraining Aid
Magnetic
Locking System black



Item 5318

Restraining Aid
Patent Twist
Locking System green



Item 5418

Restraining Aid
Push
Locking System metal



	Size guide*	Size guide*	
Length of waist belt	5218 / 5318 / 5418	5718	
Total length	2050 mm / 80.7 inches	2450 mm / 96.5 inches	
Wide strap	590 mm / 23.2 inches	590 mm / 23.2 inches	
Narrow strap (each side)	730 mm / 28.7 inches	930 mm / 36.6 inches	
Span width of belts	920 - 1370 mm / 36.2 - 53.9 inches	700 - 1430 mm / 27.6 - 56.3 inches	

^{*} approximate measurements - about 8% shrinkage possible (products are not pre-washed)



Item 5718



SEGUF **X*-Restraining Aid (with Buckle Lock)

Intended use:

- Provides assistance while restraining patients on stretchers.

 After the restraint is applied, the SEGUFIX®-Restraining Aid may be removed.
- Additional stabilization of the patient
- Can also be fastened above the knees
- Also compatible for ambulance services
- Not a restraint (Note: some jurisdictions consider Velcro® products as a restraint, should the patient not be able to remove them without help)

Attachment to the stretcher with a Buckle Lock

Consisting of:

1 SEGUFIX®-Restraining Aid with Buckle Lock







Item 6216 / 6316 / 6416

	Waist o	jirth*
S	380 - 780 mm	15.0 - 30.7 inches
М	700 -1090 mm	27.6 - 42.9 inches
L	1070-1480 mm	42.1 - 58.3 inches

SEGUFX*-Transport Waist Belt

Intended use:

- To support patients in wheelchairs, automobiles and other compatible seats
- Physically restraining patients

Requirements:

- SEGUFIX®-Backrest Strap (Item 6730), see page 35
- SEGUFIX®-Suspender Belt (Item 6720) if needed, see page 35

Width of waist belt: 130 mm* / 5.1 inches*

Consisting of:

- 1 SEGUFIX®-Transport Waist Belt
- 1 SEGUFIX®-Lock
- 1 SEGUFIX®-Key

Sizes: S / M / L

Component part: Item 6116 (lock and key not included)



SEGUFIX®-Transport Waist Belt – Select one of three locking systems:

Item 6216

Transport Waist Belt



Item 6316

Transport Waist Belt



Transport Waist

Item 6416

Belt

Push Locking System metal

^{*} approximate measurements - products are not pre-washed



Item 6710

Waist girth*		
S	440 - 650 mm	17.3 - 25.6 inches
М	650 - 920 mm	25.6 - 36.2 inches
L	900 -1300 mm	35.4 - 51.2 inches

SEGUFX*-Transport Waist Belt Velcro*

Patent Twist Locking System green

Intended use:

- To support patients in wheelchairs, automobiles and other compatible seats
- Not a restraint (note: some jurisdictions consider Velcro® products as a restraint, should the patient not be able to remove them without help)

Requirements:

- SEGUFIX®-Backrest Strap (Item 6730), see page 35
- SEGUFIX®-Suspender Belt (Item 6720) if needed, see page 35
- The Velcro® Fastener must overlap at least 250 mm / 9.8 inches

Width of waist belt: 130 mm* / 5.1 inches*

Consisting of:

1 SEGUFIX®-Transport Waist Belt with Velcro® Fastener

Sizes: S / M / L





Picture left: SEGUFIX®-Transport Waist Belt (Item 6216) and SEGUFIX®-Backrest Strap (Item 6730)

Picture right: SEGUFIX®-Transport Waist Belt Velcro® (Item 6710) and SEGUFIX®-Backrest Strap (Item 6730)


(Example of use with Magnetic Locking System black)



Attention:

The SEGUFIX®-Transport System does not replace the vehicles own seat belt system.

The SEGUFIX®-Transport System may only be used as additional support or positioning of the patient.





Item 6720

Girth torso*			
S	890 -1280 mm	35.0 - 50.4	inches
М	1050-1950 mm	41.3 - 76.8	inches

SEGUF X°-Suspender Belt

Intended use:

- To support patients in wheelchairs, automobiles and other compatible seats
- Holds the patient in an upright position, prevents patient from sliding down
- Not a restraint (note: some jurisdictions consider products with Snap Locks as a restraint, should the patient not be able to remove them without help)

Requirements:

- SEGUFIX®-Backrest Strap, see above
- SEGUFIX®-Transport Waist Belt, see page 34

Consisting of:

1 SEGUFIX®-Suspender Belt with Snap Lock

Sizes: S / M



^{*} approximate measurements - products are not pre-washed



Item 6730

ı	Circumference of backrest vertical*		
	S	780 - 1030 mm	30.7 - 40.6 inches
	М	980 - 1230 mm	38.6 - 48.4 inches
	L	1180 - 1430 mm	46.5 - 56.3 inches
	XL	1420 - 1680 mm	55.9 - 66.1 inches

SEGUFX®-Backrest Strap

Intended use:

 To attach the SEGUFIX®-Transport Waist Belt and the SEGUFIX®-Suspender Belt to the backrest

Requirements:

- May not be used on folding wheelchairs with a soft backrest
- A gap between backrest and seat
- Attaches to the backrest with Velcro® Fastener
- The Velcro® Fastener must overlap at least 250 mm / 9.8 inches

Width of waist belt: 180 mm* / 7.1 inches*

Consisting of:

1 SEGUFIX®-Backrest Strap with Velcro® Fastener

Sizes: S / M / L / XL





Example of use with Magnetic Locking System black:

SEGUFIX®-Suspender Belt (Item 6720), SEGUFIX®-Transport Waist Belt (Item 6216) and SEGUFIX®-Backrest Strap (Item 6730)



Item 6240 / 6340 / 6440

SEGUFX -Support Belt

Intended use:

- Supports the sitting patient in compatible chairs
- Supports the upper body while preventing the patient from sliding off of the seat
- Physically restraining patients

Requirements:

- A gap between backrest and seat
- Attaches behind the backrest with a Lock

Consisting of:

- 1 SEGUFIX®-Support Belt
- 1 SEGUFIX®-Lock
- 1 SEGUFIX®-Key

Sizes: S / M / L

Component part:

Item 6140: Support Belt (lock and key not included)





SEGUFIX®-Support Belt – Select one of three locking systems:

Item 6240

Support Belt
Magnetic



Item 6340

Support Belt Patent Twist

Locking System green

Item 6440

Support Belt Push

Locking System metal

Size guide*			
Size	Girth Waist belt (a)	Connection b	Shoulder collar C
S	900 - 1300 mm	100 mm	800 mm
	35.4 - 51.2 inches	3.9 inches	31.5 inches
М	900 - 1300 mm	150 mm	800 mm
	35.4 - 51.2 inches	5.9 inches	31.5 inches
L	1220 - 1620 mm	150 mm	950 mm
	48.0 - 63.8 inches	5.9 inches	37.4 inches

- * approximate measurements products are not pre-washed
- (a) Girth of patient and backrest at waist height
- (b) Connecting strap between waist belt and shoulder collar
- c Inner circumference of the shoulder collar

Measurements are taken while the patient is sitting.





Item 6244 / 6344 / 6444



SEGUF X -Support Belt (with Crotch Pad)

Intended use:

- Supports the sitting patient in compatible chairs
- Supports the upper body while preventing the patient from sliding off of the seat
- Physically restraining patients

Requirements:

- A gap between backrest and seat
- Attaches behind the backrest with a Lock

Consisting of:

- 1 SEGUFIX®-Support Belt
- 1 SEGUFIX®-Crotch Pad
- 1 SEGUFIX®-Lock

1 SEGUFIX®-Key
Sizes: S / M / L

Component parts:

Item 6140: Support Belt Item 6040: Crotch Pad (lock and key not included)





SEGUFIX®-Support Belt – Select one of three locking systems:

Item 6244

Support Belt Magnetic Locking Syst



0

Support Belt Patent Twist

Item 6344

Locking System green



Item 6444

Support Belt



Locking System metal



Item 6256 / 6356 / 6456

SEGUFX®-Multi Belt

Intended use:

- Support belt with Velcro® Fastener and eyelets for a Lock for patients in chairs, armchairs and other compatible seats
- Also compatible for ambulance stretchers, or for support on shower chairs (without lock)
- Physically restraining patients

Consisting of:

- 1 SEGUFIX®-Multi Belt
- 1 SEGUFIX®-Lock
- 1 SEGUFIX®-Key

Sizes: XS / S / M / L

Component part: Item 6156 (lock and key not included)



SEGUFIX®-Multi Belt - Select one of three locking systems:

Item 6256

Multi Belt
Magnetic
Locking System black



Item 6356

Multi Belt
Patent Twist
Locking System green



Item 6456

Multi Belt Push

Locking System metal





SEGUFIX®-Protective Cover Item 8013 see page 39

	Size guide*				
Size	Totel length	Width of waist belt	Circumference** with Velcro® Fastener	Circumference** with Locking System	
XS	1600 mm 63.0 inches	140 mm 5.5 inches	1000 - 1350 mm 39.4 - 53.2 inches	1100 - 1500 mm 43.3 - 59.1 inches	
S	1800 mm 70.9 inches	140 mm 5.5 inches	1200 - 1550 mm 49.2 - 61.0 inches	1300 - 1700 mm 51.2 - 67.0 inches	
М	2000 mm 78.7 inches	140 mm 5.5 inches	1350 - 1750 mm 53.2 - 68.9 inches	1500 - 1900 mm 59.1 - 74.8 inches	
L	2400 mm 94.5 inches	140 mm 5.5 inches	1750 - 2150 mm 68.9 - 84.7 inches	1900 - 2300 mm 74.8 - 90.6 inches	

^{*} approximate measurements - products are not pre-washed



Item 6750

SEGUF[¥]X[®]-Multi Belt Velcro[®]

Intended use:

- Support belt with Velcro® Fastener for patients in chairs, armchairs and other compatible seats
- Also compatible with ambulance stretchers, or for support on shower chairs
- Not a restraint (note: some jurisdictions consider Velcro® products as a restraint, should the patient not be able to remove them without help)

Requirement:

- The Velcro® Fastener must overlap at least 250 mm / 9.8 inches

Consisting of:

1 SEGUFIX®-Multi Belt with Velcro® Fastener

Sizes: XS / S / M / L



^{**} total girth: patient and backrest/stretcher



Item 6266 / 6366 / 6466

SEGUF X°-Pelvic Belt

Intended use:

- Support belt with eyelets for compatible seats chairs
- Physically restraining patients

Width of waist belt: 130 mm* / 5.1 inches* Length from Lock to Lock (adjustable): 1170 - 1360 mm* / 46.1 - 53.5 inches*

Consisting of:

- 1 SEGUFIX®-Pelvic Belt
- 2 SEGUFIX®-Locks
- 1 SEGUFIX®-Key

Component part: Item 6166 (lock and key not included)





SEGUFIX®-Pelvic Belt - Select one of three locking systems:

Item 6266

Pelvic Belt Magnetic

Locking System black

Item 6366

Pelvic Belt Patent Twist

Item 6466

Pelvic Belt Push

11 0 1



^{*} approximate measurements - products are not pre-washed



Item 6760

SEGUFX*-Pelvic Belt with Snap Lock

Intended use:

- Support belt with Snap Lock for compatible chairs
- Not a restraint (note: some jurisdictions consider products with Snap Locks as a restraint, should the patient not be able to remove them without help)

Requirement:

- Capacity of the Snap Lock up to 70 kg

Width of waist belt: 130 mm* / 5.1 inches* Length from Lock to Lock (adjustable): 740 - 1500 mm* / 29.1 - 59.1 inches*

Consisting of:

1 SEGUFIX®-Pelvic Belt with Snap Lock







Exampel of use: SEGUFIX®-Pelvic Belt (Item 6760) and Anti-Slide-Mat (Item 8017)

Anti-Slide-Mat

- · Prevents the patient from sliding off of the seat
- Great for use on chairs, care chairs, wheelchairs, in bed, office chairs etc.
- Allows for easy sliding in one direction, sliding in the other direction is prevented
- Washable in hot wash cycles up to 80°C

For more information see page 46





Item 6276 / 6376 / 6476

SEGUFX*-Pelvic Belt with Crotch Strap

Intended use:

- Support belt with eyelets for compatible chairs
- Prevents patients from sliding off of the chair
- Physically restraining patients

Requirement:

- Gap between backrest and seat

Width of waist belt: 130 mm* / 5.1 inches* Total girth: 1400 - 1800 mm* / 55.1 - 70.9 inches*

Consisting of:

- 1 SEGUFIX®-Pelvic Belt with Crotch Strap
- 1 SEGUFIX®-Lock
- 1 SEGUFIX®-Key

Component part: Item 6176 (lock and key not included)





SEGUFIX®-Pelvic Belt with Crotch Strap - Select one of three locking systems:

Item 6276

Pelvic Belt with Crotch Strap

Magnetic Locking System black

Item 6376

Pelvic Belt with Crotch Strap

Patent Twist Locking System green

Item 6476

Pelvic Belt with Crotch Strap

Push Locking System metal

^{*} approximate measurements - products are not pre-washed



Item 8013



SEGUFX*-Protective Cover

Intended use:

- The SEGUFIX®-Protective Cover protects these SEGUFIX®-Transport-Belts from staining:
 - SEGUFIX®-Multi Belt, see page 37
 - SEGUFIX®-Pelvic Belt, see page 38

Requirements with Protective Cover:

- The SEGUFIX®-Mult Belt cannot be used with a lock
- The SEGUFIX®-Pelvic Belt can be used with a lock

Features:

- washable in hot wash cycles up to 95°C, autoclavable and bacteria resistant

Material:

- 100% Polyester
- Coated with 100% Polyurethane

Consisting of:

1 SEGUFIX®-Protective Cover





Item 7240 / 7340 / 7440



SEGUFX Chair Belt

Intended use:

- To support and position patients in wheelchairs and other compatible chairs
- Physically restraining patients

Attaches behind the backrest with a Snap Lock (capacity up to 70 kg) Circumference of backrest: 700 - 1500 mm* / 27.6 - 59.1 inches* Width of waist belt: 140 mm* / 5.5 inches*

Consisting of:

- 1 SEGUFIX®-Chair Belt
- 1 SEGUFIX®-Lock
- 1 SEGUFIX®-Key

Sizes: S / M / L

Versions: Basic version / f

Component part: Item 7140 (lock and key not included)



SEGUFIX®-Chair Belt - Select one of three locking systems:

Item 7240

Chair Belt Magnetic



Item 7340

Chair Belt Patent Twist

Locking System green

Item 7440

Chair Belt

Push

Locking System metal

Versions		
Basic version	(no letter code)	
f = fleece	skin-friendly padding, 100% pure cotton	

_				
	Waist girth*			
	S	520 - 820 mm	20.5 - 32.3 inches	
	М	800 -1200 mm	31.5 - 47.2 inches	
Γ	L	1160-1560 mm	45.7 - 61.4 inches	

* approximate measurements about 8% shrinkage possible (products are not pre-washed)



Item 7246 / 7346 / 7446



SEGUFX*-Chair Belt

Intended use:

- To support and position patients in wheelchairs and other compatible chairs
- Physically restraining patients

Attaches behind the backrest with a Lock

Circumference of backrest: 700 - 1150 mm* / 27.6 - 45.3 inches*

Width of waist belt: 140 mm* / 5.5 inches*

Consisting of:

- 1 SEGUFIX®-Chair Belt
- 2 SEGUFIX®-Locks
- 1 SEGUFIX®-Key

Sizes: S / M / L

Versions: Basic version / f

Component part: Item 7146 (lock and key not included)



SEGUFIX®-Chair Belt - Select one of three locking systems:

Item 7246

Chair Belt Magnetic

Locking System black

Item 7346

Chair Belt Patent Twist

Locking System green

Item 7446

Chair Belt

Push

Locking System metal



Item 7740

Waist girth*			
S	520 - 820 mm	20.5 - 32.3 inches	
М	800 -1200 mm	31.5 - 47.2 inches	
L	1160-1560 mm	45.7 - 61.4 inches	

SEGUFX*-Chair Belt Velcro*

Intended use:

- To support and position patients in wheelchairs and other compatible chairs
- Not a restraint (note: some jurisdictions consider Velcro® products as a restraint, should the patient not be able to remove them without help)

Attaches behind the backrest with a Snap Lock (capacity up to 70 kg) Circumference of backrest: 700 - 1500 mm* / 27.6 - 59.1 inches* Width of waist belt: 140 mm* / 5.5 inches*

The Velcro® Fastener must overlap at least 250 mm / 9.8 inches

Consisting of:

- 1 SEGUFIX®-Chair Belt with Velcro® Fastener
- Sizes: S / M / L





* approximate measurements - about 8% shrinkage possible (products are not pre-washed)



SEGUFIX®-Extension Belt with eyelets for locking systems (Item 3144) see page 26



SEGUFIX®-Extension Belt for products with a Snap Lock (Item 3745) see page 26 The attachment straps of the SEGUFIX®-Chair Belts can be extended with the Extension Belts.



Optional additions to the SEGUFIX-Chair Belt System:



SEGUFIX®-Transport Hand Strap Velcro® (Item 7770)



SEGUFIX®-Transport Foot Restraint Velcro® (Item 7780)



SEGUFIX®-Transport Foot Restraint (Item 7280)

For more information see page 44

(Example of use with Magnetic Locking System black)



Item 7250 / 7350 / 7450



SEGUFX*-Chair Belt with Crotch Strap

Intended use:

- To support and position patients in wheelchairs and other compatible chairs
- Prevents the patient from sliding off of the seat
- Physically restraining patients

Attaches behind the backrest with a Snap Lock (capacity up to 70 kg) Circumference of backrest: 700 - 1500 mm* / 27.6 - 59.1 inches* Width of waist belt: 140 mm* / 5.5 inches*

Consisting of:

- 1 SEGUFIX®-Chair Belt with Crotch Stap
- 1 SEGUFIX®-Lock
- 1 SEGUFIX®-Key

Sizes: S / M / L

Versions: Basic version / f


Component part: Item 7150 (lock and key not included)



SEGUFIX®-Chair Belt with Crotch Strap - Select one of three locking systems:

Item 7250

Chair Belt with Magnetic



Item 7350

Chair Belt with Patent Twist Locking System green

Item 7450

Chair Belt with

Push

Locking System metal

	Versions
Basic version	(no letter code)
f = fleece	skin-friendly padding, 100% pure cotton

Waist girth*			
S	520 - 820 mm	20.5 - 32.3 inches	
М	800 -1200 mm	31.5 - 47.2 inches	
L	1160-1560 mm	45.7 - 61.4 inches	

* approximate measurements about 8% shrinkage possible (products are not pre-washed)



Item 7256 / 7356 / 7456



SEGUF X°-Chair Belt with Crotch Strap

Intended use:

- To support and position patients in wheelchairs and other compatible chairs
- Prevents the patient from sliding off of the seat
- Physically restraining patients

Attaches behind the backrest with a Lock Circumference of backrest: 700 - 1150 mm* / 27.6 - 45.3 inches* Width of waist belt: 140 mm* / 5.5 inches*

Consisting of:

- 1 SEGUFIX®-Chair Belt with Crotch Stap
- 2 SEGUFIX®-Locks
- 1 SEGUFIX®-Key

Sizes: S / M / L

Versions: Basic version / f

Component part: Item 7156 (lock and key not included)



SEGUFIX®-Chair Belt with Crotch Strap – Select one of three locking systems: Item 7356

Item 7256

Chair Belt with Magnetic

Locking System black



Chair Belt with Patent Twist Locking System green





Chair Belt with



Locking System metal

tem 1106 - 1215



Item 7260 / 7360 / 7460



SEGUFX*-Chair Belt with Thigh Straps

Intended use:

- To support and position patients in wheelchairs and other compatible chairs
- Prevents the patient from sliding off of the seat
- Physically restraining patients

Attaches behind the backrest with a Snap Lock (capacity up to 70 kg) Circumference of backrest: 700 - 1500 mm* / 27.6 - 59.1 inches* Width of waist belt: 140 mm* / 5.5 inches*

Consisting of:

- 1 SEGUFIX®-Chair Belt with Thigh Straps
- 3 SEGUFIX®-Locks
- 1 SEGUFIX®-Key

Sizes: S / M / L

Versions: Basic version / f

Component part: Item 7160 (lock and key not included)



SEGUFIX®-Chair Belt with Thigh Straps – Select one of three locking systems:

Item 7260

Chair Belt with Thigh Straps

Magnetic Locking System black

Item 7360

Chair Belt with Thigh Straps

Patent Twist Locking System green

Item 7460

Chair Belt with Thigh Straps

Push Locking System metal

	Waist girth*		
S	520 - 820 mm	20.5 - 32.3	inches
М	800 -1200 mm	31.5 - 47.2	inches
L	1160-1560 mm	45.7 - 61.4	inches

	Thigh girth*		
	S	380 - 520 mm	15.0 - 20.5 inches
	М	500 - 720 mm	19.7 - 28.4 inches
	L	580 - 880 mm	22.8 - 34.7 inches

* approximate measurements about 8% shrinkage possible (products are not pre-washed)

See versions on page 42





Item 7266 / 7366 / 7466



SEGUFX*-Chair Belt with Thigh Straps

Intended use:

- To support and position patients in wheelchairs and other compatible chairs
- Prevents the patient from sliding off of the seat
- Physically restraining patients

Attaches behind the backrest with a Lock

Circumference of backrest: 700 - 11500 mm* / 27.6 - 45.3 inches*

Width of waist belt: 140 mm* / 5.5 inches*

Consisting of:

- 1 SEGUFIX®-Chair Belt with Thigh Straps
- 4 SEGUFIX®-Locks
- 1 SEGUFIX®-Key

Sizes: S / M / L

Versions: Basic version / f


Component part: Item 7166 (lock and key not included)



SEGUFIX®-Chair Belt with Thigh Straps - Select one of three locking systems:

Item 7266

Chair Belt with Thigh Straps





Magnetic Locking System black

Item 7366

Chair Belt with Thigh Straps



Patent Twist Locking System green

Item 7466

Chair Belt with Thigh Straps

Push Locking System metal





Item 7770

160 - 240 mm | 6.3 - 9.5 inches

SEGUFX*-Transport Hand Strap Velcro*

- To position the hands of patients on armrests of wheelchairs and other compatible chairs
- Not a restraint (note: some jurisdictions consider Velcro® products as a restraint, should the patient not be able to remove them without help)

Consisting of:

1 SEGUFIX®-Transport Hand Strap with Velcro® Fastener (1 Hand Strap)





Item 7780

220 - 300 mm 8.7 -11.8 inches

SEGUFX*-Transport Foot Restraint Velcro*

Intended use:

- To position the feet of patients in wheelchairs and other compatible chairs
- Not a restraint (note: some jurisdictions consider Velcro® products as a restraint, should the patient not be able to remove them without help)

Attaches to the wheel chair:

With a Buckle Lock (girth: 800 - 1000 mm* / 31.5 - 39.4 inches*)

Consisting of:

1 SEGUFIX®-Transport Foot Restraint with Velcro® Fastener (for both feet)



* approximate measurements - about 8% shrinkage possible (products are not pre-washed)



Item 7280 / 7380 / 7480

220 - 300 mm 8.7 -11.8 inches

SEGUFX®-Transport Foot Restraint

Intended use:

- To position the feet of patients in wheelchairs and other compatible chairs
- Physically restraining patients

Attaches to the wheel chair:

With a Lock (girth: 680 - 1120 mm* / 26.8 - 44.1 inches*)

Consisting of:

1 SEGUFIX®-Transport Foot Restraint (for both feet)

3 SEGUFIX®-Locks

1 SEGUFIX®-Key

Component part: Item 7180 (lock and key not included)



SEGUFIX®-Transport Foot Restraint - Select one of three locking systems:

Item 7280

Transport Foot Restraint

Magnetic Locking System black

Item 7380

Transport Foot Restraint



Item 7480

Transport Foot Restraint

Push Locking System metal





Instructions for care for sheepskin products see page 15



SEGUFX Sheepskin Bed Cover

Features:

- Skin-friendly
- Compensates for changing temperatures
- Quick absorption and dispersion of perspiration

Size: approx. 900 x 1800 mm* / 35.4 x 70.9 inches*

Consisting of:

1 SEGUFIX®-Sheepskin Bed Cover







SEGUFX -Sheepskin Wheelchair Cover

Features:

- Skin-friendly
- Compensates for changing temperatures
- Quick absorption and dispersion of perspiration

Size: approx. 400 x 1000 mm* / 15.8 x 39.4 inches*

Consisting of:

1 SEGUFIX®-Sheepskin Wheelchair Cover



30°



SEGUFX*-Sheepskin Padding for SEGUFIX*-Standard

Compatible with:

- SEGUFIX®-Standard with Crotch Strap (see images left)
- SEGUFIX®-Standard with Thigh Straps


Features:

- Skin-friendly
- Compensates for changing temperatures
- Quick absorption and dispersion of perspiration



1 SEGUFIX®-Sheepskin Padding for Standard

Sizes: S / M / L



Item 8012





(Example of use with Magnetic locking system black)

* approximate measurements - products are not pre-washed



Interesting facts about medical sheepskins

Medical sheepskins are natural products which help to ensure a healthy and constant temperature. This gives a relaxing and revitalizing effect over the entire applied area.

Doctors recommend natural sheepskin especially for use with bedsores, allergies, neuralgia, nervousness, poor circulation, rheumatism, sciatica, back pain and limb pain.

Other positive qualities of natural sheepskin

- Immediate absorption of perspiration and seven times faster dispersion into air than synthetic materials.
 - Body toxins secreted with perspiration are broken down.
- Sheepskins are a natural product and therefore have a selfcleaning effect.
- Natural sheepskin is at body temperature and never feels cold.
 Natural breathing of the patient's skin is ensured.
- Temperature balanced, suitable for summer and winter use.
- Non-static.



Item 8014

SEGUFX -Transport Bag

Intended use:

- To store several SEGUFIX® products on various hospital wards
- To protect SEGUFIX® products
- Useful for transporting SEGUFIX® products, also great for in-house training

Features:

- Separate pockets on each end
- Handles and detachable carrying strap
- Size: approx. 620 x 320 x 280 mm / 24.4 x 13.0 x 10.6 inches
- Colour: black (white SEGUFIX® print)

Consisting of:

1 SEGUFIX®-Transport-Bag



Item 8015

SEGUFX*-Response Bag

Intended use:

- Quick access for fast response
- Protects SEGUFIX® products
- Well arranged storage for your SEGUFIX®-sets, e.g. 1 SEGUFIX®-Complete,
 1 SEGUFIX®-Quick-Restraint-System etc.
- Space saver, several bags may be stacked for organized storage

Features:

- Pockets for the SEGUFIX®-Manual and additional SEGUFIX®-Locks and Keys etc.
- Handle and detachable carrying strap
- Bag is padded
- Size: approx. 420 x 260 x 100 mm / 16.5 x 10.2 x 3.9 inches
- Colour: red / black, (white SEGUFIX® print)



1 SEGUFIX®-Response Bag (contents not included)





Item 8017

Anti-Slide-Mat

Intended use:

- Prevents weak patients from sliding off of their chair
- Great for use on chairs, care chairs, wheelchairs, in bed, office chairs etc.

Application:

- Allows for easy sliding in one direction, sliding in the other direction is prevented
- Not for restless patients
- The Anti-Slide-Mat does not work when wet
- Maximum tensile load: 250 kg
- Size: approx. 370 x 430 mm* / 14.6 x 17.0 inches*

Instructions for care:

- After washing the Anti-Slide-Mat must be completely dry before use to ensure proper function
- Dryer instructions: (beginning temperature 80°C, ending temperature 60°C)
- No detergent, no bleach.
- May not be disinfected

Consisting of:

1 Anti-Slide-Mat



Auxiliary Belts



SEGUFX*-Pull-up Line

Intended use:

- Helps the patient to sit up in bed in an ergonomic manner, preventing damage to the spine

Total length: 1600 mm* / 63.0 inches*

(* approx. measurements - about 8% shrinkage possible)

Consisting of:

1 SEGUFIX®-Pull-up Line

Item 8016





SEGUFX -Laundry Net

Intended use:

- Protects SEGUFIX® products during wash cycle

Size: approx. 600 x 400 mm* / 23.6 x 15.8 inches*

Consisting of:


1 SEGUFIX®-Laundry Net with integrated drawstring





Item 8022

Item 8018/GB



Intended use:

- Shows the propper use of SEGUFIX®-products
- Great for in-house training

Features:

- Individual product selection from menu
- Approx. running time: 170 minutes
- PAL version

Consisting of:

1 SEGUFIX®-Instruction DVD

The SEGUFIX®-Instruction DVD is also available in German: Item 8018/D



See price list on page 18 for all sizes, prices and versions



Almost 50 years of:

Competence

Experience

Quality

Dependability

Innovation

Edition 11 - 2017-03

The general business and delivery terms apply: www.segufix.com/PDFs/AGBs.pdf

Product specifications subject to change.

Deviations from pictures in colour and shape, errors and amendments excepted.

Velcro® is a registered trademark of Velcro® Industries B.V.

SEGUFIX® is a registered trademark of SEGUFIX®-Bandagen, Das Humane System GmbH & Co. KG.

© SEGUFIX®-Bandagen, 2017

All rights reserved. Reprints or distribution using electronic systems/media, in its entirety or in parts, with prior explicit authorization in writing only.


All requests concerning this must be directed at: SEGUFIX®-Bandagen
Das Humane System GmbH & Co. KG, Allerbeeksring 33, 21266 Jesteburg, Germany.

Copyright notice

Use of this catalogue is limited to the user indicated in the footer text as help for product use and product information. All rights are reserved.

Tangible and intangible reproduction, distribution, provision of public access (especially over the internet) and/or editing of the entire catalogue or parts thereof are subject to prior authorization in writing of

SEGUFIX®-Bandagen
Das Humane System GmbH & Co. KG.



Das Humane System GmbH & Co. KG P.O. Box 1142 · D-21262 Jesteburg Allerbeeksring 33 · D-21266 Jesteburg GERMANY Phone: +49 (0) 4183 500-0 Fax: +49 (0) 4183 500-200 E-mail: export@segufix.de www.segufix.com www.segufix-shop.com